


GENERAL NOTS:


1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DESIGN STANDARD EN40.
3. DESIGN WELD SPEED 16.0 km/h.
4. ALL CAST ALUM. ALLOY SHALL B 300.1 (EN1561-160).
5. ALL FASTENERS SHALL BE STAINLESS STEEL GR. 316 EQUIVALENT UNLESS OTHER SPECIFIED.
6. ALL WELDING SHALL BE DONE IN ACCORDANCE WITH THE AWS / BS ISO 9492-1 EQV- ALUMINIUM.
7. ALL WELDING SHALL BE DONE IN ACCORDANCE WITH THE AWS / BS ISO 9492-1 EQV- STEEL.
8. SUPER DURABLE POWDER COATING BS 4949-1:1984 THICKNESS 100 MICRON (AVERAGE) BS EN 12206-1:2000.
9. STEEL REINFORCEMENT CORE-HOT DIP GALVANIZED.
10. PIPE : BS EN 10219-1 :EQV
11. ANCHOR BOLT & BASE PLATE: ASTM A572M GR. 345 OR EQUI.
12. FINISHING: PAINTED / COATED (RAL 7024)

FLAG DETAILS



SCALE 1 : 20 t:10mm


ANCHOR BOLT DETAILS



— 8 —



Klasör <i>Binder</i>	PROJ.NO:2506014
Dosya Adı <i>File Name</i>	BMTC PROJECT
Resim No <i>Picture No</i>	
Revizyon No <i>Revision No</i>	1/2

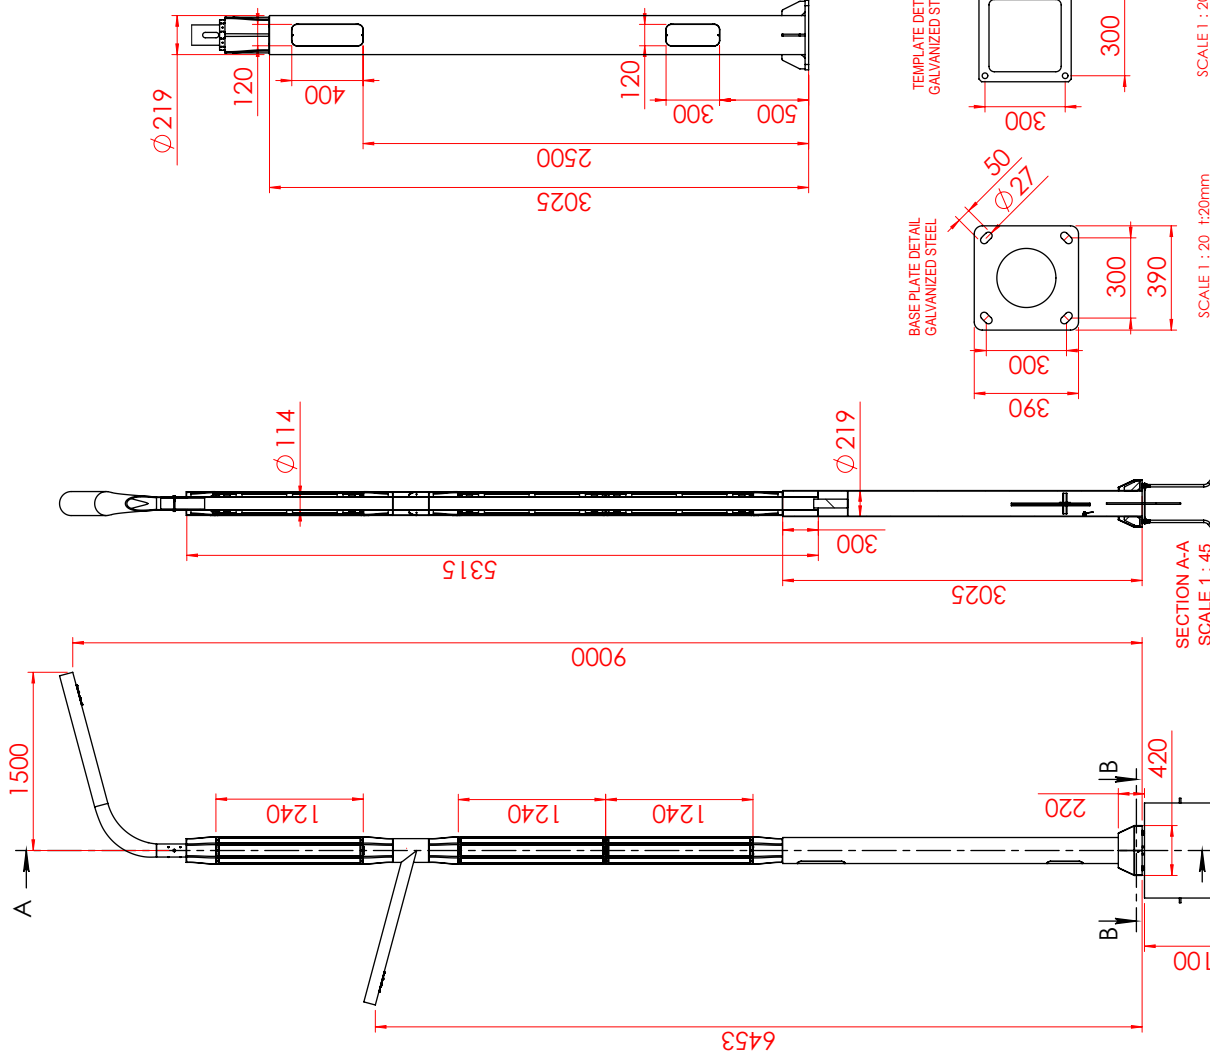


SECTION A-A
SCALE 1 : 45

SCALE 1 : 20 t:20mm

SCALE 1 : 20 t:2mm

Proje <i>Project</i>	Tarih <i>Date</i>	Adı Soyadı <i>Name Surname</i>	İmza <i>Sign</i>	Malzeme <i>Material</i>
Çizim / Desinger	18.08.2025	YUSUF SALİH		
Kontrol /Controller				
Parça Adı <i>Part Name</i>				
H:9mSOLAR PATHWAY DOUBLE POLE				
Ölçek Scale 1/1 A3	Vida Anma Çapları Genel Tablosu <i>The General Table For Screw Nominal Diameter</i>		Belirtilmeyen toleranslar <i>Unspecified Tolerance</i>	
	Anma Çapı <i>Nominal Diameter</i>	Anma Çapı <i>Nominal Diameter</i>	Arañlık <i>Interval</i>	Hassas-Precision
	1/2"	3/4"	1"	0.5 ≤ 30
	1 1/4"	1 1/2"	2"	0.5 ≤ 30
	Disi - Internal	Erkek - External		
	20.7 ± 0.2	26.2 ± 0.2	32.9 ± 0.3	41.6 ± 0.4
45.5 ± 0.5	57.3 ± 0.5	73.0 ± 0.5	93.0 ± 0.5	



SECTION B-B
SCALE 1 : 45

