
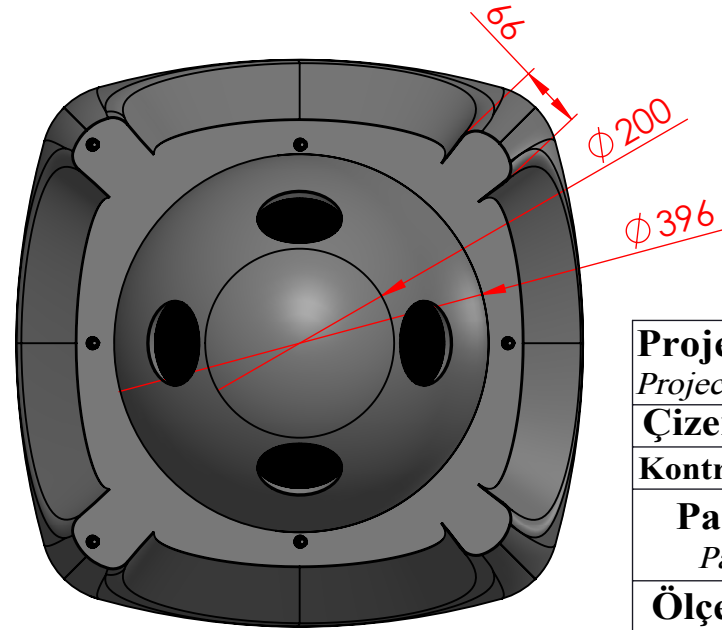
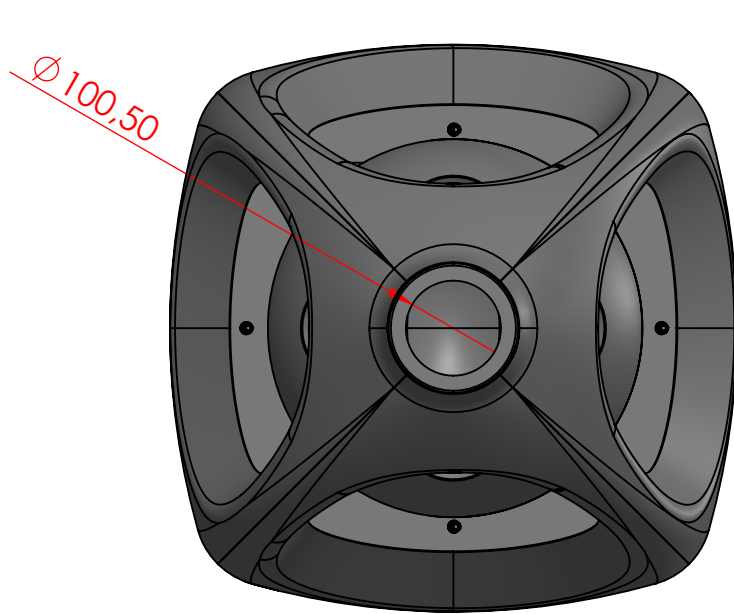
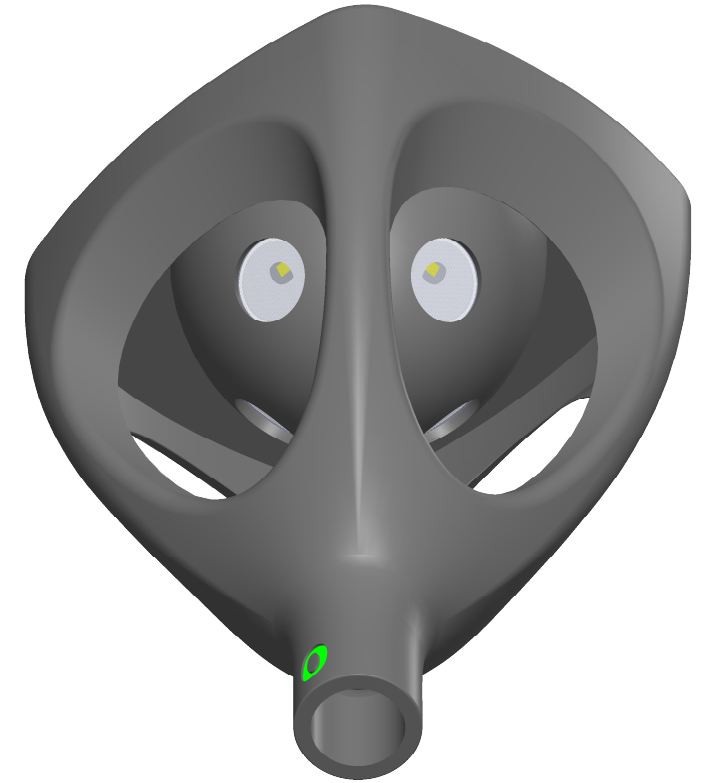
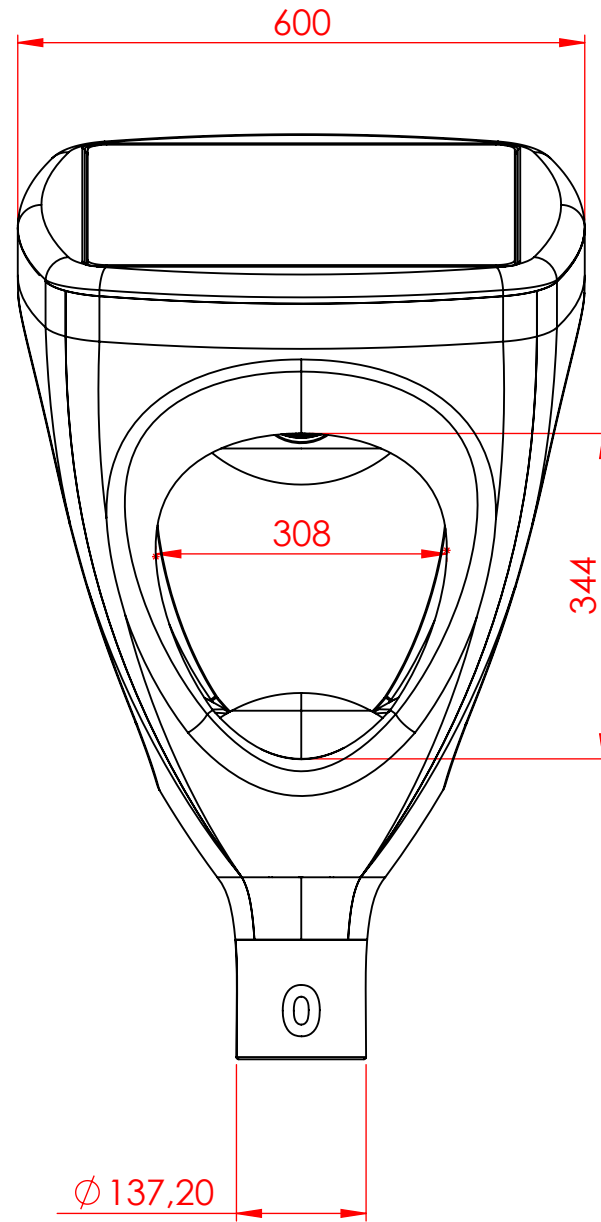


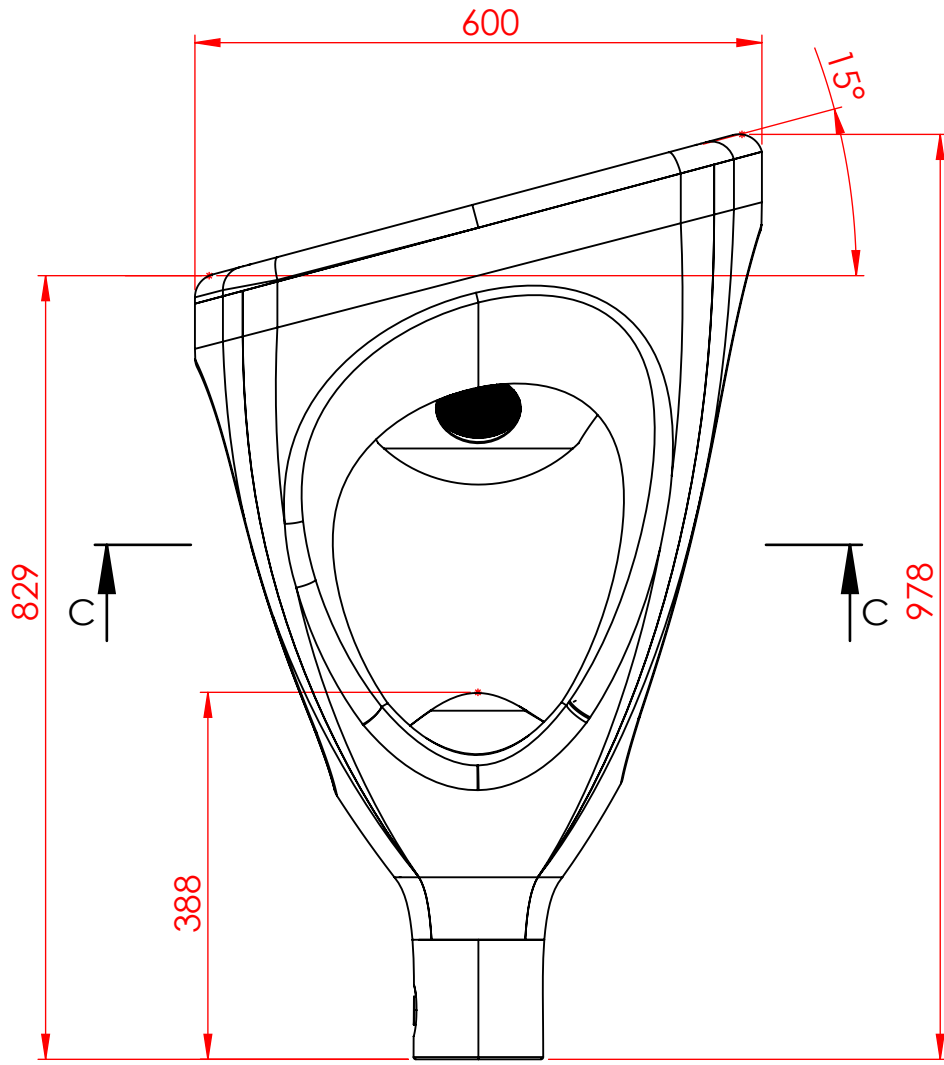

SECTION C-C
SCALE 1 : 8

GENERAL NOTS:

1. ALL DIMENSION ARE IN MILIMETER.
2. DESIGN STANDART EN40.
3. DESIGN WILD SPEED 130 km/h.
4. ALL CAST ALUM. ALLOY SHALL B 380,1 (Etial-160).
5. ALL FASTENERS SHALL BE STAINLESS STEEL GR. 316 EQUIVALENT UNLEDD OTHER SPECIFIED.
6. ALL WELDING SHALL BE DORE IN ACCORDANCE WIHT THE ANSI /BS EN ISO 9692-1-EQV- ALUMINUM .
7. ALL WELDING SHALL BE DORE IN ACCORDANCE WIHT THE ANSI /BS EN ISO 9692-1-EQV- STEEL.
8. SUPER DURABLE POWDER COATUNG BS.6496-1984 THICKNESS 100 MICRON (AVERAGE) BS EN 12206-1:2000.
9. STEEL REINFORCEMENT CORE-HOT DIP GALVANIZED.
10. PIPE : BS EN 10219-1 -EQV
11. ANCHOR BOLT & BASE PLATE: ASTM A572M GR. 345 OR EQUI.
12. FINISHING: PAINTED / COATED (RAL # TO BE PROVIDED BY THE CUSTOMER)

Proje Project		Tarih Date	Adı Soyadı Name Surname		İmza Sign		Malzeme Material		 OptoSmart				
Çizen / Desinger		27.10.2023	YUSUF SALİH										
Kontrol /Controller													
Parça Adı Part Name		RUTA FIXTURE							Klasör Binder				
Ölçek Scale		Vida Anma Çapları Genel Tablosu The General Table For Screw Nominal Diameter					Belirtilmeyen toleranslar Unspecified Tolerance					Dosya Adı File Name	
		Anma Çapı Nominal Diameter	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	Aralık Inreval	$0.5 \leq 6$	$6 \leq 30$	$30 \leq 120$	Resim No Picture No
1/1 A3		Dişi - Internal	19.2 ⁰ _{-0.2}	24.7 ⁰ _{-0.2}	31 ⁰ _{-0.2}	39.6 ⁰ _{-0.2}	45.5 ⁰ _{-0.2}	57.3 ⁰ _{-0.2}	Hassas-Precision	±0.05	±0.1	±0.15	Revizyon No Revision No
		Erkek -External	20.7 ^{+0.1} ₀	26.2 ^{+0.1} ₀	32.9 ^{+0.1} ₀	41.6 ^{+0.1} ₀	47.5 ^{+0.1} ₀	59.3 ^{+0.1} ₀	Orta- Moderate	±0.1	±0.2	±0.3	